

**BREAK
THROUGH.
BUILD
BEYOND.**

GreyHeavy



TECHNICAL SPECIFICATIONS	G230	
	G230	G280
Operating Weight (kg)	2330	2850
Tool Diameter (mm)	150	160
Input Power (kw)	48,2	62,7
Operating Pressure (bar)	160-180	165-185
Oil Flow (l/min)	150-190	180-250
Impact Rate (bpm)	350-650	275-450
Carrier Weight (ton)	25-35	34-55

Maximum Impact. Built for Demolition.

Grey Line heavy breakers are developed for maximum impact in large-scale demolition and quarry operations.

Engineered with a high-capacity power unit, they deliver consistent performance even under the toughest conditions.

The gas-hydraulic hybrid system allows wide operating pressure ranges, making the breaker compatible with multiple heavy-class excavators.


Advanced damping systems reduce vibration and protect both the carrier and breaker components, extending service life and minimizing downtime.

Wear-resistant housing and oversized impact components ensure long-term durability in mining and heavy-duty applications.

Grey Line heavy breakers offer the perfect balance of raw power, efficiency, and durability for your most demanding jobs.




Grey^{LINE} SUPERIORITIES



Wide working pressure range allows ease of operation & fuel saving

High performance & equipments specialized for needs are create difference by Grey Line regardless of its light weight.

Solid cabin provides extreme durability against abrasions.

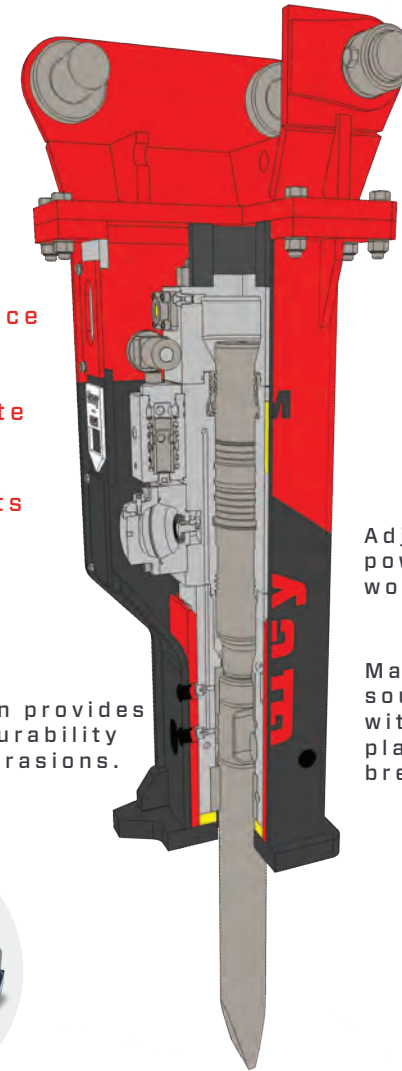

Automatic oil flow hydraulic lubrication station*



Adjustable stroke power according to working conditions.


Maximum damping in sound & vibration with long abrasion plates surrounding breaker.



*Opsinal Equipment


Red Line / Hydraulic

Red

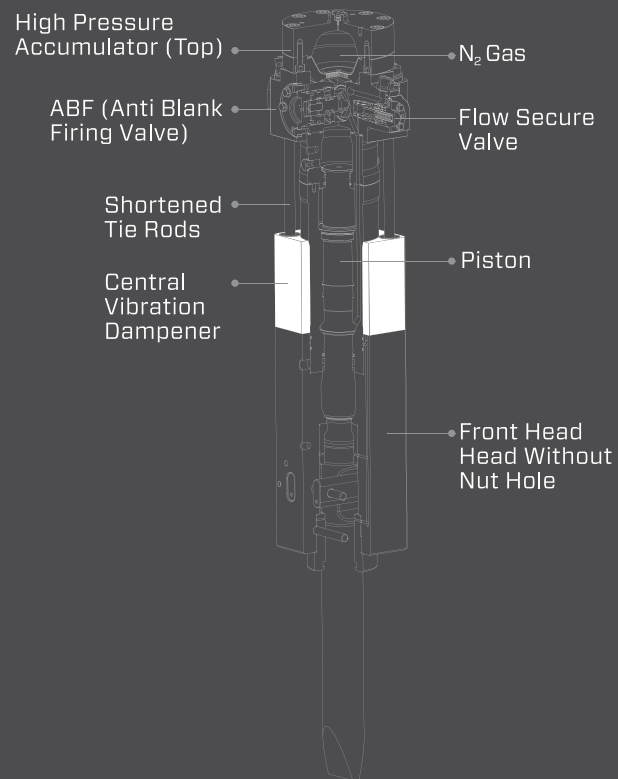

Grey Line / Hybrid

Grey

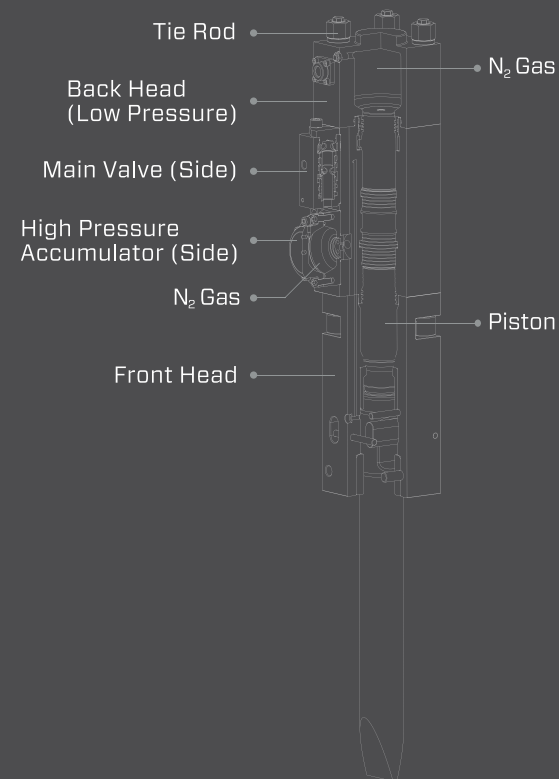

BREAK THROUGH. BUILD BEYOND. HKM

Showroom

Dudullu OSB Mahallesi, İmes Sanayi Sitesi C306 Sk. No:2, 34775 Ümraniye, İstanbul/Türkiye

☎ +90 216 499 4585

✉ sales@hkm.com.tr

www.hkm.com.tr

📷 @hkmbreakers **in** @hkmbreakers

HKM