

**BREAK
THROUGH.
BUILD
BEYOND.**

GreyMedium



G60



G90



G120



G170

TECHNICAL SPECIFICATIONS

	G60	G90	G120	G170
Operating Weight (kg)	600	955	1240	1720
Tool Diameter (mm)	85	100	120	135
Input Power (kw)	19,3	25,3	28,0	34,4
Operating Pressure (bar)	130-160	150-170	150-170	140-160
Oil Flow (l/min)	60-100	80-110	90-120	125-150
Impact Rate (bpm)	400-800	350-750	400-750	400-700
Carrier Weight (ton)	7-14	12-20	14-22	18-26

Lightweight Build. Heavy Performance.

HKM Grey Line breakers are engineered to generate the simplest solutions and high performance.


Power unit which is a combination of gas and hydraulic working principle can be used in a wide range of working oil pressure. Thus, Grey Line breakers can be attach to various excavators and saves fuel with adjustable pressure settings.

Despite its light weight, Grey Line medium breakers make difference with high performance.

Maximum damping in sound & vibration with long abrasion plates surrounding breaker minimizes spare part consumption.




Grey^{LINE} SUPERIORITIES



Wide working pressure range allows ease of operation & fuel saving

High performance & equipments specialized for needs are create difference by Grey Line regardless of its light weight.

Solid cabin provides extreme durability against abrasions.

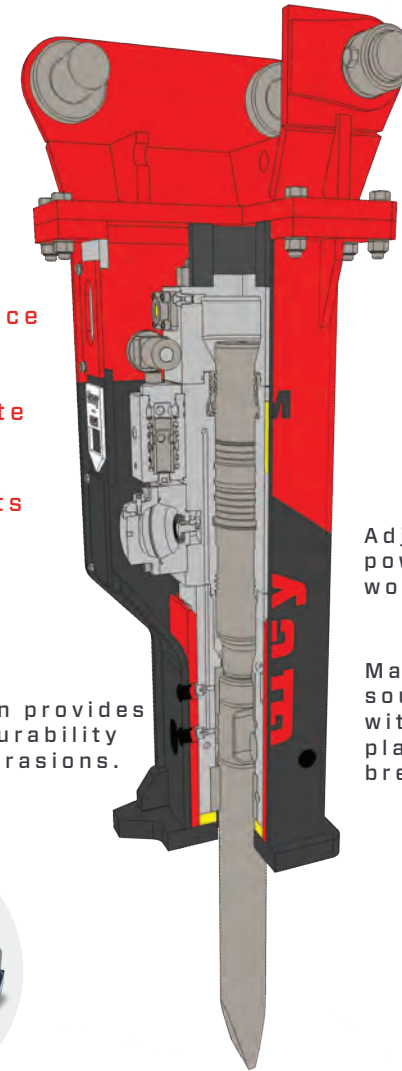

Automatic oil flow hydraulic lubrication station*



Adjustable stroke power according to working conditions.


Maximum damping in sound & vibration with long abrasion plates surrounding breaker.



*Opsinal Equipment


Red Line / Hydraulic

Red

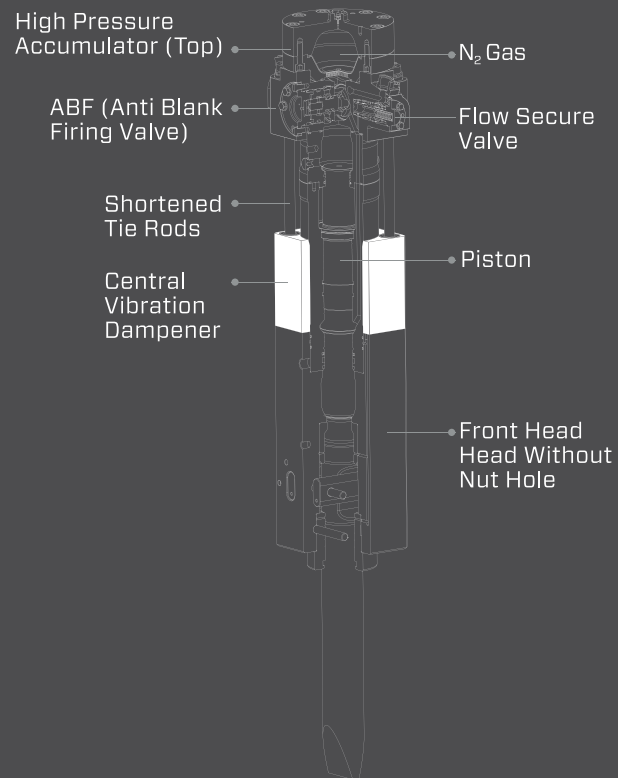

Grey Line / Hybrid

Grey

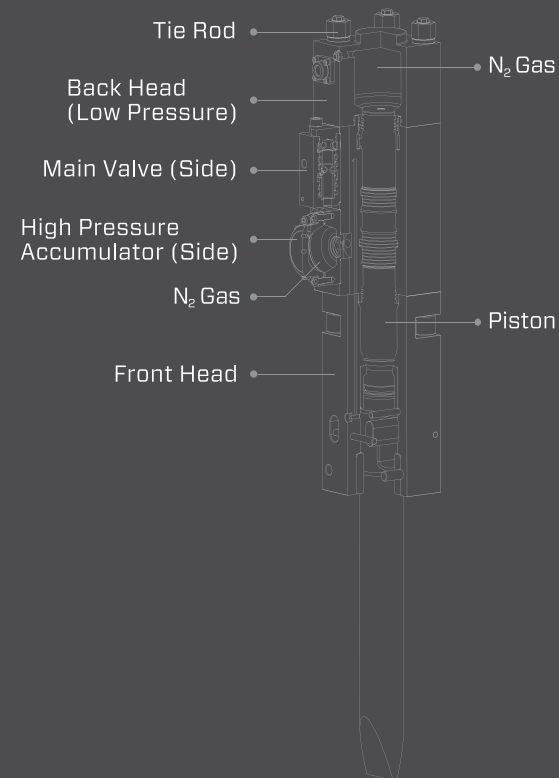

BREAK THROUGH. BUILD BEYOND. HKM

Showroom

Dudullu OSB Mahallesi, İmes Sanayi Sitesi C306 Sk. No:2, 34775 Ümraniye, İstanbul/Türkiye

☎ +90 216 499 4585

✉ sales@hkm.com.tr

www.hkm.com.tr

📷 @hkmbreakers **in** @hkmbreakers

HKM