BREAK
THROUGH.
BUILD
BEYOND.
HKM
Red
R200
HKM
Grey
G280
hkm.com.tr
HKM

GreyMini

G10

G12

G15

G20

G30

G40

TECHNICAL SPECIFICATIONS	G10	G12	G15	G20	G30	G40
Operating Weight (kg)	110	120	155	220	320	400
Tool Diameter (mm)	40	45	53	60	68	75
Input Power (kw)	3,2	5,3	6,6	6,6	11,5	15,8
Operating Pressure (bar)	75-95	90-120	90-120	90-120	110-140	120-150
Oil Flow (l/min)	15-30	20-40	25-50	30-45	40-70	50-90
Impact Rate (bpm)	900-1400	700-1200	600-1100	550-800	500-900	400-800
Carrier Weight (ton)	0,7-3	1,2-3	1,5-5	2-5	3-9	6-12

Compact Design.
Urban Precision.

Grey Line Mini breakers engineered for effective & easy use in urban areas for asphalt breaking, demolition and trench works.

Hybrid power unit makes wide range of operating oil pressure and oil flow possible which simplifies your work.

Slim design allows easy access in trench. Simplified power unit with less components help to make a trouble-free operation and ergonomic details are included to save time on jobsite.

Grey Line mini breakers are the fast and affordable answer for landscaping and urban demolition works.

Grey LINE
SUPERIORITIES



Wide working pressure range allows ease of operation & fuel saving



Automatic oil flow hydraulic lubrication station*

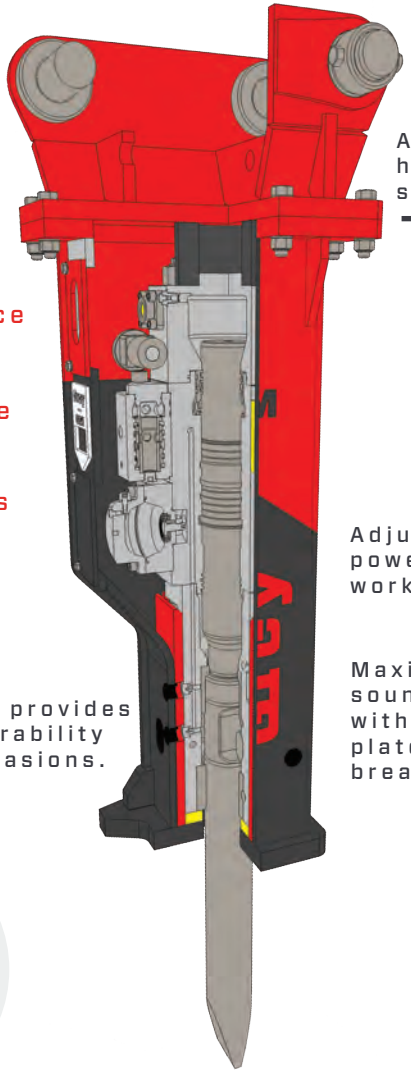

Adjustable stroke power according to working conditions.

High performance & equipments specialized for needs are create difference by Grey Line regardless of its light weight.

Maximum damping in sound & vibration with long abrasion plates surrounding breaker.

Solid cabin provides extreme durability against abrasions.

*Opsinal Equipment

Red Line / Hydraulic

Red

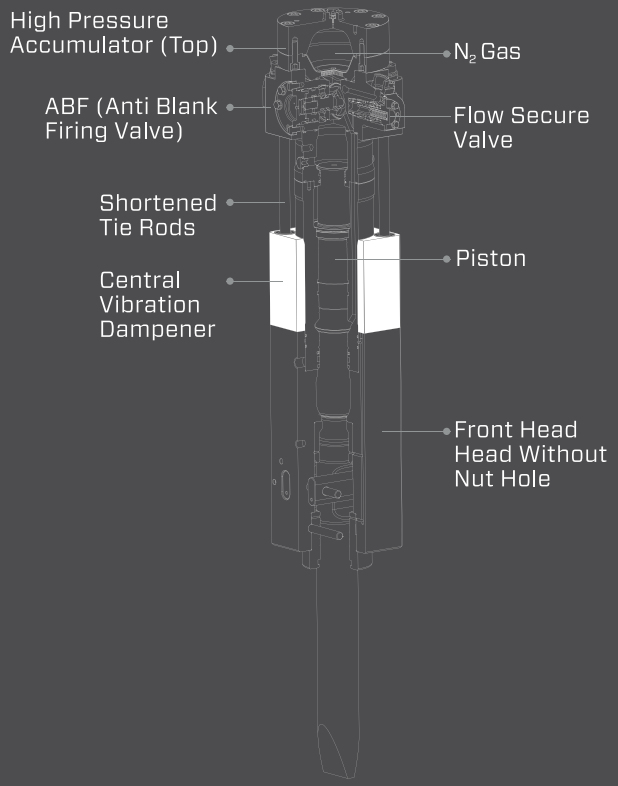

Grey Line / Hybrid

Grey

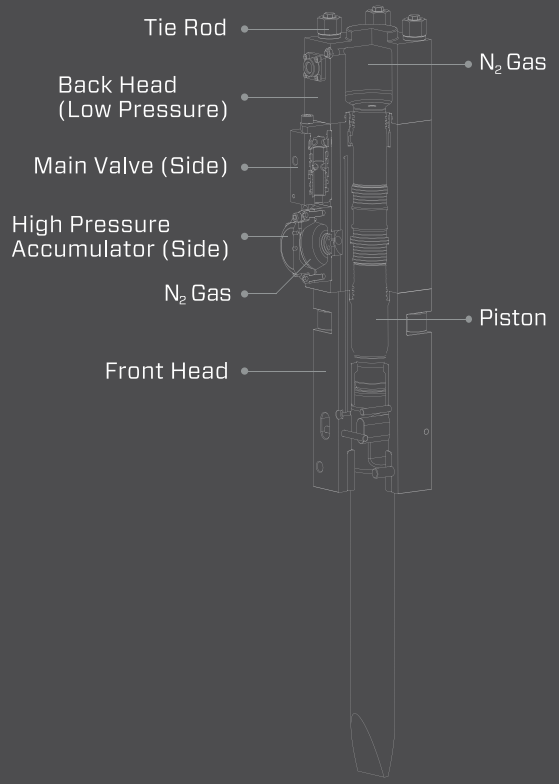

BREAK THROUGH. BUILD BEYOND. HKM

Showroom
Dudullu OSB Mahallesi, Imes Sanayi Sitesi C306 Sk. No:2, 34775 Umraniye, Istanbul/Turkiye

+90 216 499 4585
sales@hkm.com.tr
www.hkm.com.tr

@hkmbreakers @hkmbreakers