


HKM

RIPPERS

HKM Rippers combine brute digging force with precision engineering to excel in the toughest ground condition. Constructed from wear-resistant steel and featuring alloyed components each model from **RP20 to RP50** delivers exceptional strength, toughness and corrosion resistance.

Interchangeable, serrated cutting teeth bolt on in minutes and the rugged mounting bracket **resists bending under load**. The result is reliable, low-maintenance performance that **maximizes productivity** and keeps your excavator breaking new ground with minimal downtime.



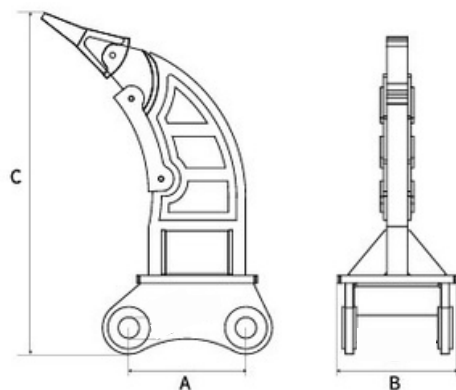

TECHNICAL SPECIFICATIONS	RP20	RP25	RP30	RP35	RP40	RP50
Carrier Weight (ton)	18-26	26-35	30-40	40-50	50-65	65-90
Operating Weight (kg)	426	575	730	850	1320	1810
Pin to Pin Distance A (mm)	465	520	570	570	600	670
Width B (mm)	870	950	1115	1166	1227	1356
Height C (mm)	1300	1415	1495	1665	1788	1989
Plate Thickness (mm)	80	80	90	90	100	100
Teeth Model (type)	D85C	D85C	4T5502	4T5502	D11	D11

Key Features

High-Grade Manganese Steel body for extreme wear resistance

Alloy Pin Shaft with built-in lubrication passages for superior toughness

Interchangeable Bolt-On Teeth for fast, tool-free replacement

Durable Mounting Bracket engineered to withstand high bending forces

HKM



RP20



RP25



RP30



RP35



RP40



RP50

Application Areas

Compacted & Hardened Soils

Stiff, high-density earth layers that resist standard digging

Frozen Ground & Permafrost

Sub-zero, ice-bonded soil conditions

Soft Rock Seams & Weathered Stone

Fractured or friable rock zones

Loose Geological Materials

Sandy, silty or mixed fill in trenching and site-prep operations

Benefits

Increased Productivity

Fast fracture and remove obstacles with minimal passes

Reduced Operating Costs

Lower labor and fuel consumption

Extended Service Life

Premium material quality and modular design to maximize its durability

Simplified Maintenance

Sealed pin shaft and replaceable wear parts minimize upkeep

Modular Wear Parts

Sealed shaft pin and replaceable wear components minimize maintenance requirements.

The HKM logo is rendered in a bold, red, sans-serif font. It is positioned in the bottom right corner of the page, which features a dark gray triangular background element.

BREAK THROUGH. BUILD BEYOND.

Address

Dudullu OSB Mahallesi, İmes Sanayi Sitesi C306 Sk. No:2, 34775 Umraniye, İstanbul/Türkiye

☎ +90 216 499 4585

✉ sales@hkm.com.tr

📷 @hkmbreakers **in** @hkmbreakers

www.shop-hkm.com.tr

HKM