

**BREAK  
THROUGH.  
BUILD  
BEYOND.**



# Red R250

## STANDARD EQUIPMENTS

-  High Pressure Accumulator
-  High Efficiency & Performance
-  Dust Protection
-  Solid Cabin Design
-  Vibration Absorption
-  Noise Absorption
-  Nut Free Tie Rod Design

## OPTIONAL EQUIPMENTS

-  Automatic Lubrication
-  Underwater Equipment
-  Reinforced Outer Cabin
-  Fast Attachment Replacement Device

## CONTROL THE POWER

R250 is engineered to bring non-stop lasting high demolition power to your worksite.


With its full hydraulic working principle and revolutionary tie rod technology, R250 brings you maximum power.

Due to shorter nut-free tie rods high demolition power does no longer mean more costs for spare parts. Shorter nut-free tie rods engineered to absorb vibrations before it increase for to extend spare part life more than ever before.

R250 comes with uniq solutions for your special needs and it is raady to make difference for tunnel, underwater and abrasive mine operations with its durability and high performance.

## TECHINAL SPECIFICATIONS

| HKM RED 250 |

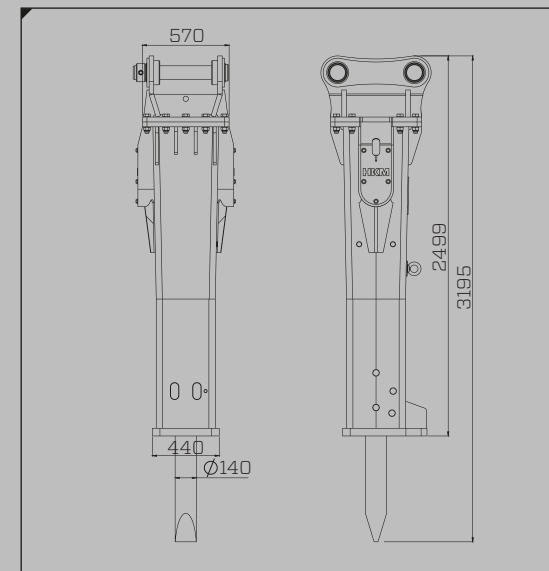

## TECHNICAL DATA

|                         |         |
|-------------------------|---------|
| Operational Weight (kg) | 2250    |
| Carrier Weight (ton)    | 25-34   |
| Tool Diameter (mm)      | 140     |
| Working Pressure (bar)  | 130-150 |
| Oil Flow (l/min)        | 160-230 |
| Impact Rate (bpm)       | 400-550 |


**Possess the power  
you need with R250  
for your heavy  
duty operations**

# Red LINE



| TECHNICAL SPECIFICATIONS | R50     | R100    | R150    | R200    | R250    | R260    | R300    | R350    |
|--------------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Operating Weight (kg)    | 370     | 960     | 1650    | 1842    | 2250    | 2510    | 2960    | 3750    |
| Tool Diameter (mm)       | 75      | 100     | 120     | 130     | 140     | 150     | 160     | 175     |
| Input Power (kw)         | 15,0    | 18,4    | 30,3    | 32,5    | 45,5    | 47,8    | 49,0    | 52,5    |
| Operating Pressure (bar) | 110-130 | 120-140 | 120-140 | 120-140 | 130-150 | 130-150 | 130-150 | 130-150 |
| Oil Flow (l/min)         | 50-100  | 70-100  | 100-180 | 120-180 | 160-230 | 170-240 | 170-250 | 210-240 |
| Impact Rate (bpm)        | 500-900 | 350-650 | 350-600 | 400-550 | 400-550 | 400-550 | 300-450 | 300-400 |
| Carrier Weight (ton)     | 3-9     | 10-16   | 18-26   | 22-29   | 25-34   | 29-40   | 33-45   | 40-55   |

# Red LINE SUPERIORITIES



Nut free tie rod design

Optimum piston stroke length, minimum excess energy


Automatic lubrication with hydraulic control \*



Reinforced housing against extreme conditions \*




Maximum sound and vibration dampening with increased wear plates



\* Optional Equipments


Red Line / Hydraulic

# Red

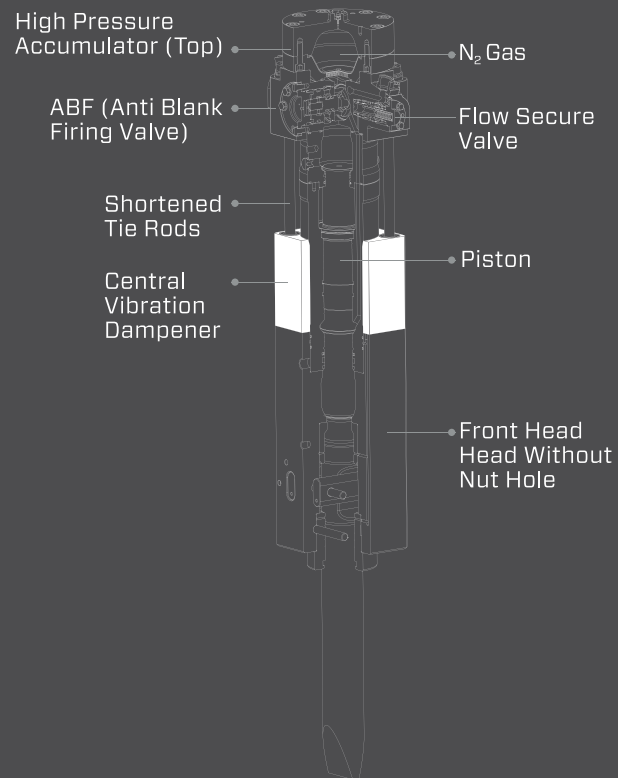

Grey Line / Hybrid

# Grey

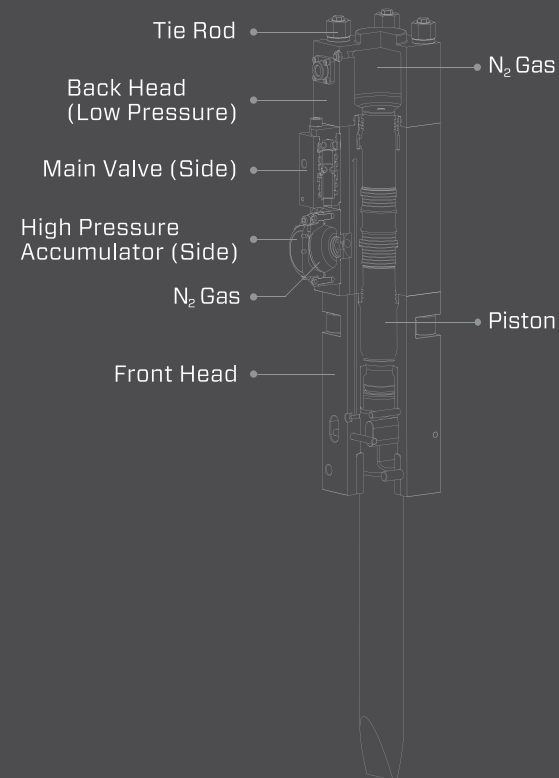

**BREAK THROUGH. BUILD BEYOND. HKM**

**Showroom**

Dudullu OSB Mahallesi, İmes Sanayi Sitesi C306 Sk. No:2, 34775 Ümraniye, İstanbul/Türkiye

☎ +90 216 499 4585

✉ sales@hkm.com.tr

**www.hkm.com.tr**

📷 @hkmbreakers in @hkmbreakers

**HKM**