

**BREAK
THROUGH.
BUILD
BEYOND.**

Red R300

R 300, to control the breaking power you need in extreme conditions

STANDARD EQUIPMENTS

-  High Pressure Accumulator
-  High Efficiency & Performance
-  Dust Protection
-  Solid Housing Design
-  Vibration Absorption
-  Noise Absorption
-  Nut Free Tie Rod Design

OPTIONAL EQUIPMENTS

-  Automatic Lubrication
-  Underwater Equipment
-  Reinforced Housing
-  Fast Attachment Replacement Device

ENGINEERED FOR RELENTLESS PERFORMANCE


R300 is crafted to maintain continuous, high-intensity demolition power across the toughest worksites.

With its high pressure accumulator located on top of main valve body, it ensures high breaking performance. And thanks to its nut free tie rod design, now its tie rods are shorter and tightened directly to front head body which mean less tie rod trouble. High demolition power does not longer mean more spare part cost.

R 300 can be customized according to your demands too. Options like long all in one bushing for better service life in tunnel jobsites, reinforced housing for extremely abrasive mine sites, underwater kit are engineered to make R 300 your favorite tool in all conditions.

TECHINAL SPECIFICATIONS

| HKM RED 300 |

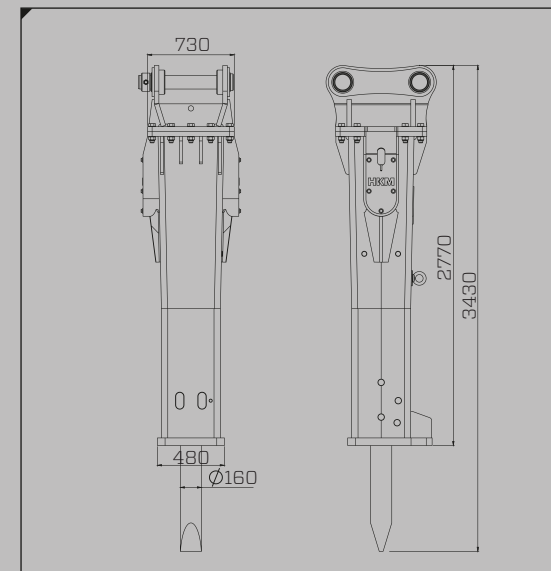

TECHNICAL DATA


Operational Weight (kg)	2960
Carrier Weight (ton)	33-45
Tool Diameter (mm)	160
Working Pressure (bar)	130-150
Oil Flow (l/min)	170-250
Impact Rate (bpm)	300-450

Red LINE



TECHNICAL SPECIFICATIONS	R50	R100	R150	R200	R250	R260	R300	R350
Operating Weight (kg)	370	960	1650	1842	2250	2510	2960	3750
Tool Diameter (mm)	75	100	120	130	140	150	160	175
Input Power (kw)	15,0	18,4	30,3	32,5	45,5	47,8	49,0	52,5
Operating Pressure (bar)	110-130	120-140	120-140	120-140	130-150	130-150	130-150	130-150
Oil Flow (l/min)	50-100	70-100	100-180	120-180	160-230	170-240	170-250	210-240
Impact Rate (bpm)	500-900	350-650	350-600	400-550	400-550	400-550	300-450	300-400
Carrier Weight (ton)	3-9	10-16	18-26	22-29	25-34	29-40	33-45	40-55

Red LINE SUPERIORITIES



Nut free tie rod design

Optimum piston stroke length, minimum excess energy


Automatic lubrication with hydraulic control *



Reinforced housing against extreme conditions *




Maximum sound and vibration dampening with increased wear plates



* Optional Equipments


Red Line / Hydraulic

Red

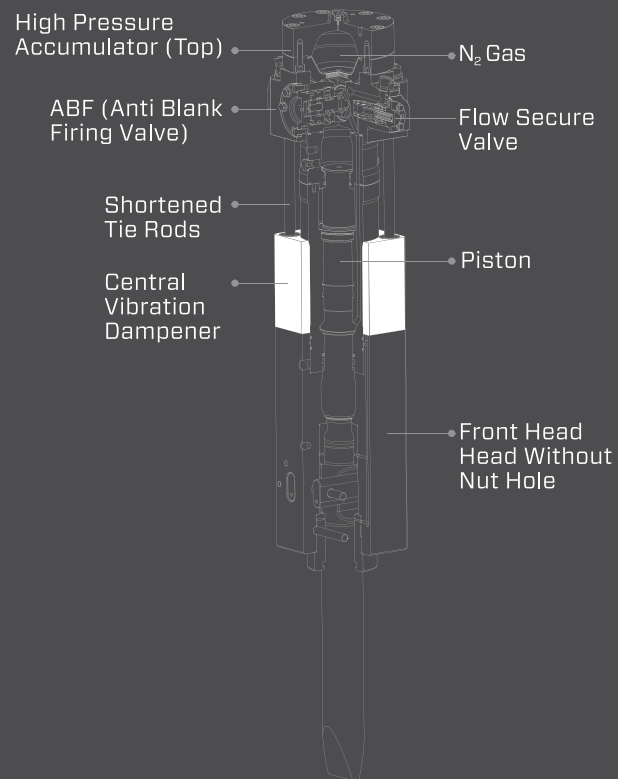

Grey Line / Hybrid

Grey

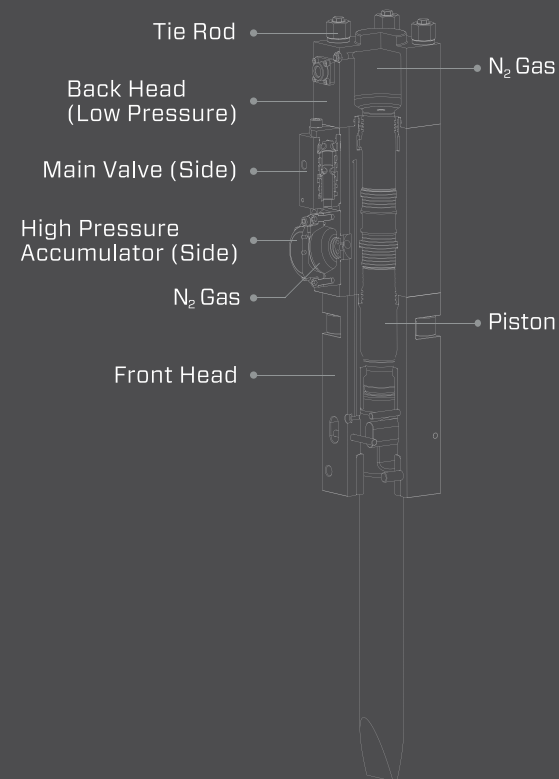

BREAK THROUGH. BUILD BEYOND. HKM

Showroom

Dudullu OSB Mahallesi, İmes Sanayi Sitesi C306 Sk. No:2, 34775 Ümraniye, İstanbul/Türkiye

☎ +90 216 499 4585

✉ sales@hkm.com.tr

www.hkm.com.tr

📷 @hkmbreakers **in** @hkmbreakers

HKM